

Premium functions for your customers

7" touch screen - High-end finish -
Automatic screen activation thanks to presence detection

Video

See, hear and talk
to visitors

Intercom function

Communication between
2 monitors

Temperature

Display of the outdoor
temperature

Image memory

Access to the visit history
(16-Gb micro SD card
provided)


Up to **5**
io homecontrol®
devices or groups
of devices

Integrated home control

Compatible devices:
roller shutters, lighting,
garage door, terrace
awnings, etc.

Wide angle camera (102° / 65°)

with infrared LEDs
night vision

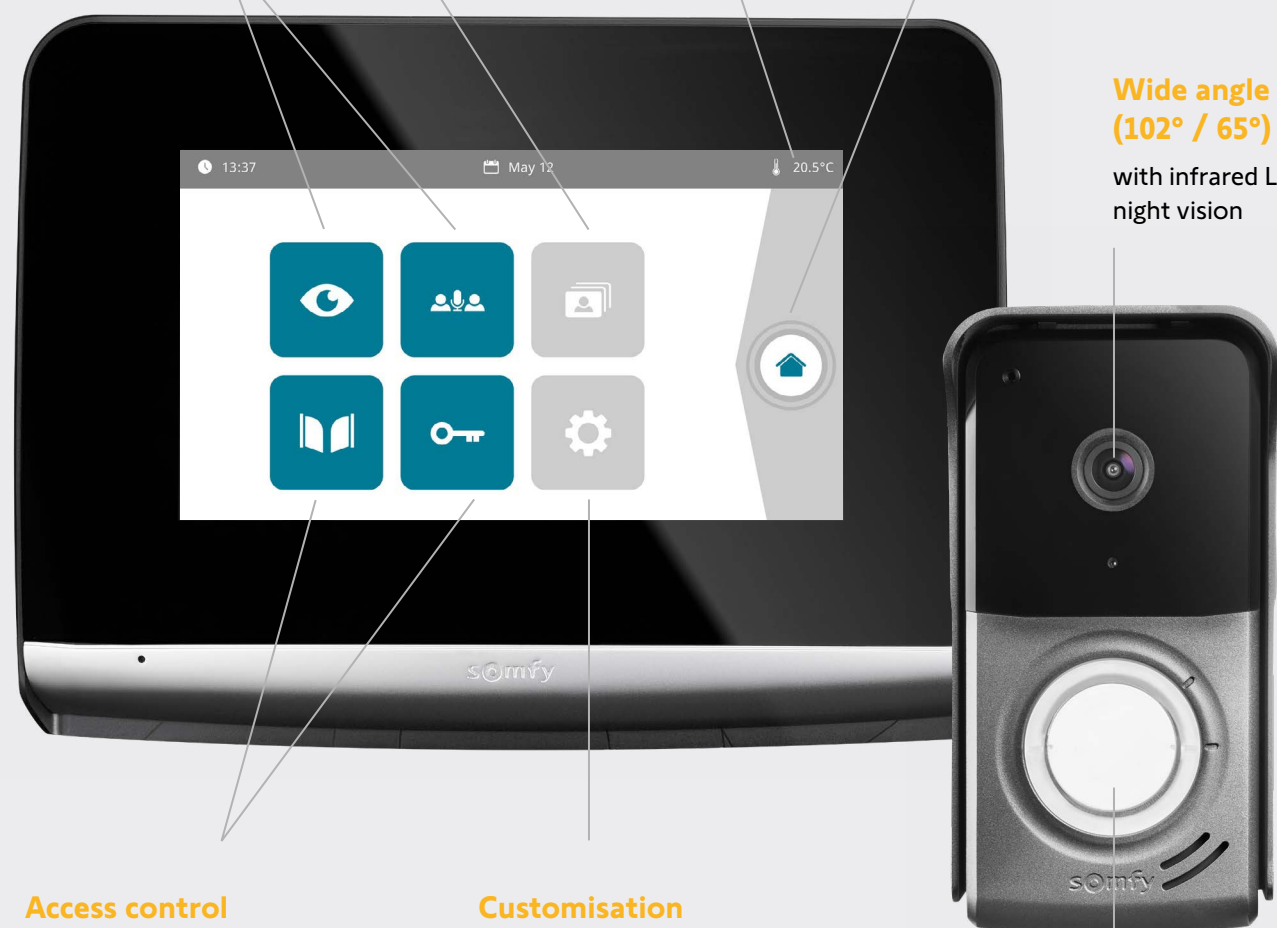

Access control

Gate (dry contact) /
Gate strike

Customisation

Customisation of
the interface

Backlit button

SOMFY

1 Place du Crêtet
BP 138 - 74307 Cluses Cedex
FRANCE
actipro@somfy.com
www.somfypro.com

SOMFY, A BRAND OF **SOMFY** GROUP

somfy

V500 PRO io

Video door phone dedicated to professionals



The quick-to-install video door phone



© SOMFY - Photos : Studio Sémaphore, Somfy - SOMFY ACTIVITES SA, capital 35 000 000 euros, RCS Annecy 303 970 230.

somfy

V500 PRO io

The benefits for you, professionals!

Easy and fast installation

- Connection using 2 wires
- 2 power modes to choose from:
DIN rail module or plug power unit
- Dedicated mounting plate
- Intuitive interface: easy to configure



Compact outdoor station

- Installation on narrow pillars (78 mm)
- Surface mounting
- Rain protection




Integrated home control

- Compatible devices: roller shutters, lighting, garage door, terrace awnings, etc.
- Possible to go a step further and launch TaHoma scenarios from the monitor




Ergonomics and size

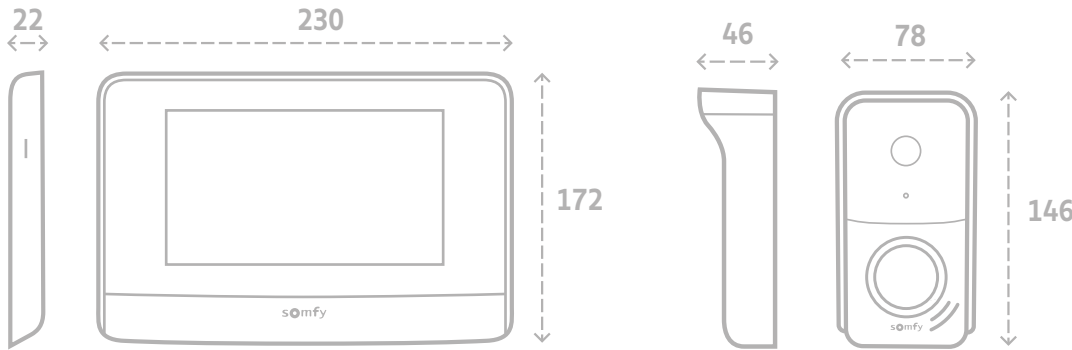

Technical specifications

Screen	7" touch screen Resolution 800x480 pixels	Vision angle	H : 102° / V : 68°
Picture storage	16 Gb micro SD card (included)	Night vision	Infrared LEDs
Number of ringtones	7 ringtones + 1 customisable via micro SD card	Outdoor station outputs	- 1 electric strike / lock output: 12V 800mA (activation time: 2, 5 or 10 seconds) - 1 dry contact output
Radio transmitter	io - 868,7 MHz - 869,2 MHz 1-way - 5-channel	Operating temperature	Indoor monitor: -10°C / +55°C Outdoor station: -20°C / +55°C
Max. distance between the monitor and the door station	150 metres - 2 wires installation	Power supply	100–240 Vac / 50–60 Hz, 24 Vdc (from the monitor)

Connection

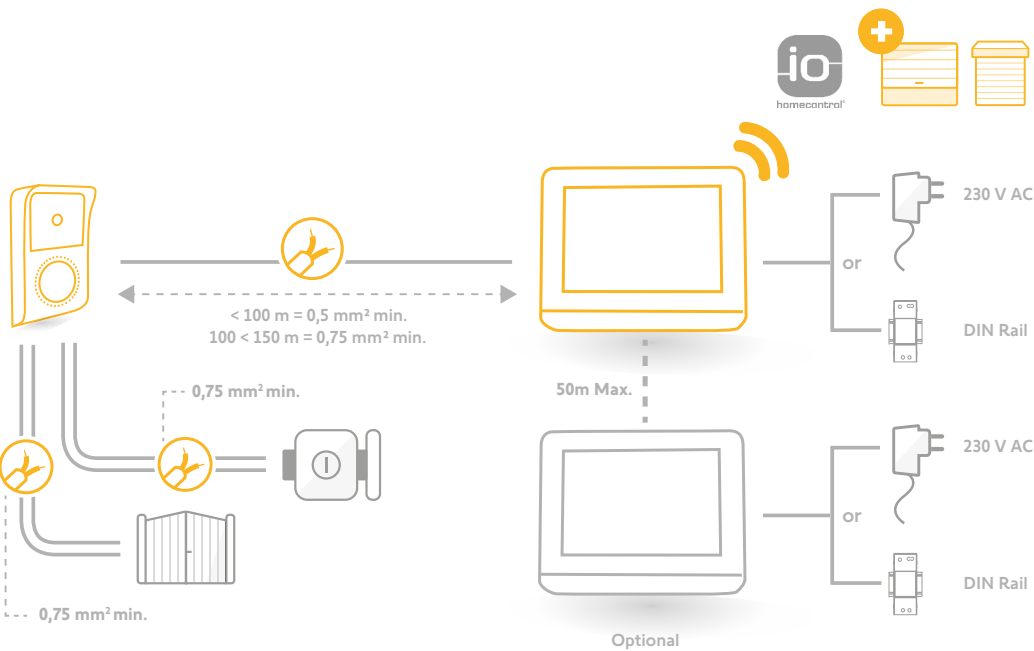

Why should you choose V500 PROio?

Tired of wasting time installing and operating a video door phone in individual houses?
The V500 PRO io video door phone is a perfect fit!



Dedicated exclusively to professional channels, it is easy to install and use while features advanced premium functions.
Compatible via radio with io-homecontrol® products, it allows you to centralise the control of the access and other devices in the house using the indoor monitor (5 channels) and thus make the everyday life of your customers easier.

Add value to your installations

- Exclusive to Somfy: Integrated home control
- Compliance with current safety standards

